





DIN 965 Z SIM. ISO 7046

cross recess Z (Pozidrive) Countersunk flat head screws

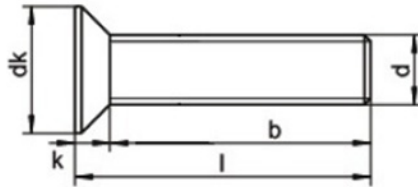

dk	3.0	3.8	4.7	5.6	7.5	9.2	11.0	14.5	18.0
k	0.96	1.20	1.50	1.65	2.20	2.50	3.00	4.00	5.00
b min.	15	16	18	19	22	25	28	34	40
[Pozidrive]	Z 0	Z 1	Z 1	Z 1	Z 2	Z 2	Z 3	Z 4	Z 4
I/Ø	M1.6	M2	M2.5	M3	M4	M5	M6	M8	M10
3	●●	●●							
4	●●	●●	●●	●●					
5	●●	●●	●●	●●	●●				
6	●●	●●	●●	●●	●●	●●			
8	●●	●●	●●	●●	●●	●●	●●		
10	●●	●●	●●	●●	●●	●●	●●		
12	●●	●●	●●	●●	●●	●●	●●	●●	
14	●●	●●	●●	●●	●●	●●	●●	●●	
16	●●	●●	●●	●●	●●	●●	●●	●●	
18		●●	●●	●●	●●	●●	●●	●●	
20		●●	●●	●●	●●	●●	●●	●●	●●
22			●●	●●	●●	●●	●●	●●	●●
25			●●	●●	●●	●●	●●	●●	●●
30				●●	●●	●●	●●	●●	●●
35				●●	●●	●●	●●	●●	●●
40				●●	●●	●●	●●	●●	●●
45				●●	●●	●●	●●	●●	●●
50				●●	●●	●●	●●	●●	●●
55				●●	●●	●●	●●	●●	●●
60				●●	●●	●●	●●	●●	●●
65					●●	●●	●●	●●	●●
70					●●	●●	●●	●●	●●
75					●●	●●	●●	●●	●●
80					●●	●●	●●	●●	●●
85					●●	●●	●●	●●	●●
90					●●	●●	●●	●●	●●
95					●●	●●	●●	●●	●●
100					●●	●●	●●	●●	●●

AVAILABLE A2 A4